


IPC Application Note: Low Maintenance AC Powered Security Gate

Mechanical Gate components:


A typical Security Gate system consists of the gate, a rail or guide system, one or two motors, a cable or chain drive, a clear path detector, end stop switches, an RF or IR command remote link and a box of electronics and relays.

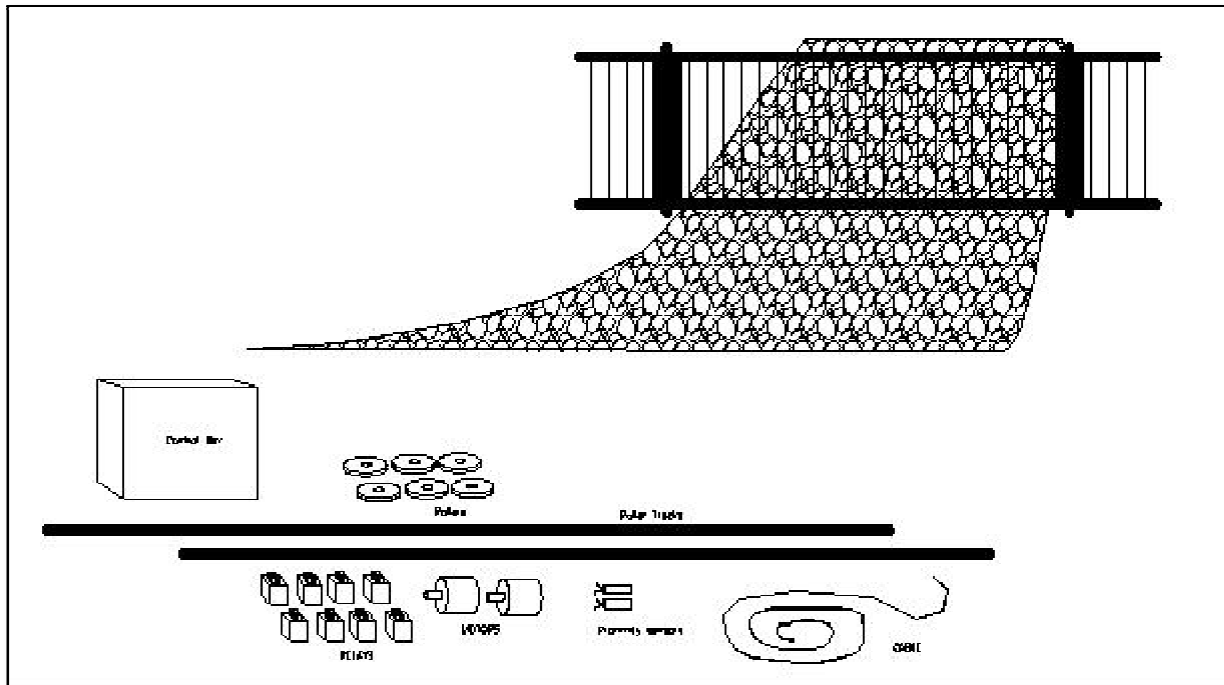

Reliability can be problematic. Cables and chains stretch requires limit switch adjustments and relays wear out or stick. The limit switches and their wires are outside the control box exposed to the elements. And nuisance or real fault circuit breaker trips require attention and resetting.

A simpler and all electrical approach is possible.

The I²t current trip curve of the Industrial Power Controller (IPC) emulates a circuit breaker and is ideally suited for this application. The motor selection can be matched to the IPC current trip curve.

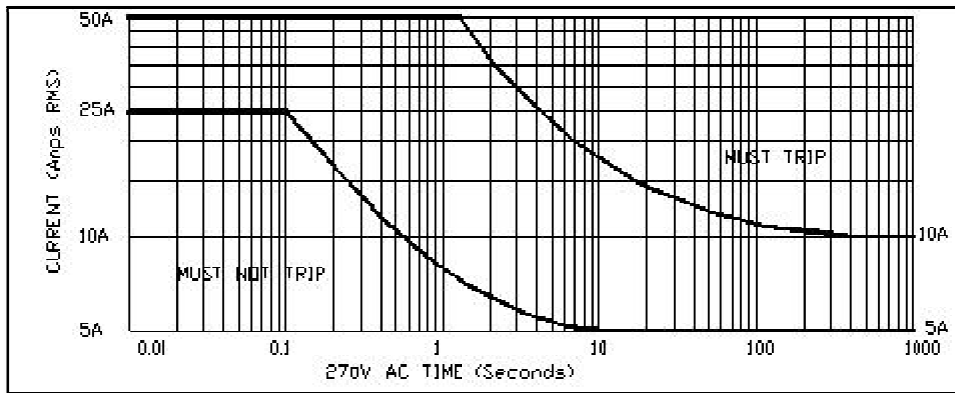

- 1) The loaded start current of the motor is available within the first 1 to 2 seconds of the I²t curve.
- 2) Motor run current is available at the IPC current rating.
- 3) Motor stall current will trip the IPC at a time of that current.

The I²t circuits and electronic switching of the IPC has no wear-out mechanism allowing this feature to be used as a normal operating design mode. The I²t characteristic of the IPC protects the source, itself, and loads within its control. Over current and fault currents are within the IPCs NORMAL operating conditions.

With a matched motor and IPC, the gate can be driven into a mechanical stop at full open or closed with no end of travel detection. The motor stalls, the current increases and the IPC turns off the motor. Obstructions to gate travel are acted upon in the same manner.

No end-of-travel sensors or switches are required eliminating their associated adjustment and maintenance. The addition of a spring loaded tension in the cable / chain circuit will further reduce stretch and wear maintenance and provide a less abrupt buildup of end stop forces to the mechanical system.

Logic control and the Status signal of the IPC allows for electronic control and monitoring of the gate condition. Normal end of travel trips and actual fault conditions are within the electronics capability. A single input from clear path detector is all that is required for gate and path condition when the detector is placed so that the closed gate is in the detection path, OPEN or CLOSED / Obstructed gate information is available.

A dual motor or two motors driven by separate IPCs can further reduce maintenance by eliminating a mechanical means of changing direction.

With an optical detector for clear gate path and a RF or IR command link, and the Output Status of the 53287s, sufficient information is available for a microprocessor to automate the full gate normal and abnormal operating conditions

Example: Using the, 400V, 5A AC IPC.





- Start current = 25A minimum, 50A maximum for 100msec and 10A minimum for 600msec
- Travel current = 5A minimum
- End-of-travel stall currents are:
 - 1) 10A maximum for 20 seconds
 - 2) 15A maximum for 4 seconds.
 - 3) 50A maximum for up to 4 seconds.

An induction motor with a start / Locked rotor current of 4 times that of rated output, the IPC will remain on for 1 second typically and 0.15 to 8 seconds minimum / maximum before the a trip occurs. The microprocessor has the ability of it programming to terminate a gate closure if a new open request is received before a closure is complete.

Results:

- The gate will always be fully open, closed or in travel. No more built in gaps.
- There are no end-of-travel sensors to adjust and subjected to the weather.
- Nuisance and fault trips can be self resetting.
- There are no mechanical contacts, relays or contactors.
- The motors operate from the AC input – no big power supplies.

Table 1 - Micropac IPC Product Line

	Micropac Part Number	Description	Rating
	53286-001	28VDC applications; MIL-STD-704E and MIL-STD-1760E compliant I ² T and instant trip overload protection; Output enable; Output status; -55°C to +125°C	V _{I-O} 500V V _O 100V; I _O 10 A DC
	53286-002	270VDC applications; MIL-STD-704E and MIL-STD-1760E compliant I ² T and instant trip overload protection; Output enable; Output status; -55°C to +125°C	V _{I-O} 750V V _O 500V; I _O 5 A DC
	53287-001	28VAC applications; MIL-STD-704E and MIL-STD-1760E compliant I ² T and instant trip overload protection; Output enable; Output status; -55°C to +125°C	V _{I-O} 750V RMS V _O 100V RMS; I _O 10 A AC
	53287-002	110 - 220VAC applications; MIL-STD-704E and MIL-STD-1760E compliant I ² T and instant trip overload protection; Output enable; Output status; -55°C to +125°C	V _{I-O} 1,000V RMS V _O 500V RMS; I _O 5 A AC



IMPORTANT NOTICE

Micropac Industries Incorporated (Micropac) reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to Micropac's terms and conditions of sale supplied at the time of order acknowledgment.

Micropac warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with Micropac's standard warranty. Testing and other quality control techniques are used to the extent Micropac deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Micropac assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using Micropac components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

Micropac does not warrant or represent that any license, either express or implied, is granted under any Micropac patent right, copyright, or other Micropac intellectual property right relating to any combination, machine, or process in which Micropac products or services are used. Information published by Micropac regarding third-party products or services does not constitute a license from Micropac to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Micropac under the patents or other intellectual property of Micropac.

Reproduction of Micropac information in Micropac data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. Micropac is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of Micropac products or services with statements different from or beyond the parameters stated by Micropac for that product or service voids all express and any implied warranties for the associated Micropac product or service and is an unfair and deceptive business practice. Micropac is not responsible or liable for any such statements.

Micropac products are not authorized for use in safety-critical applications (such as life support) where a failure of the Micropac product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Micropac products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by Micropac. Further, Buyers must fully indemnify Micropac and its representatives against any damages arising out of the use of Micropac products in such safety-critical applications.

Micropac products are neither designed nor intended for use in military/aerospace applications or environments unless the Micropac products are specifically designated by Micropac as military-grade. Only products designated by Micropac as military-grade meet military specifications. Buyers acknowledge and agree that any such use of Micropac products which Micropac has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

Micropac products are neither designed nor intended for use in automotive applications or environments unless the specific Micropac products are designated by Micropac as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, Micropac will not be responsible for any failure to meet such requirements.

Micropac Industries Incorporated

905 E. Walnut St
Garland, TX 75040

(972)272-3571
www.micropac.com